


Escareador, corte à direita, haste cone morse DIN 228 B.
 Countersink, right hand cut, morse taper shank DIN 228 B.



4202
 60° - DIN 334 B

4222
 90° - DIN 335 B

4232
 120° - DIN 347 B

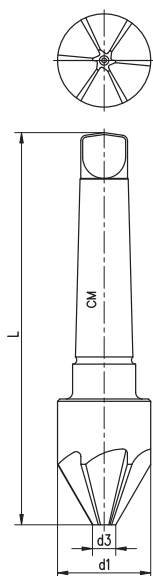

4202

d1	d3	L	CM	Z
mm	mm	mm		
16	3,2	100	1	6
25	7	125	2	8
31,5	9	132	2	8
40	12	160	3	10
50	16	170	3	12
63	20	200	4	14
80	25	215	4	16

4222

d1	d3	L	CM	Z
mm	mm	mm		
16	3,2	95	1	6
25	7	118	2	8
31,5	9	122	2	8
40	12	150	3	10
50	16	155	3	12
63	20	185	4	14
80	25	196	4	16

4232

d1	d3	L	CM	Z
mm	mm	mm		
16	3,2	95	1	6
25	7	112	2	8
31,5	9	122	2	8
40	12	140	3	10

Dados de corte, ver página 136