

Escareador 3 cortes detalonado-retificado axial e radial, corte à direita, haste cilíndrica.
 Three flute countersink relief ground axially and radially, right hand cut, straight shank.





4205

60° - DIN 334 C

4225

90° - DIN 335 C

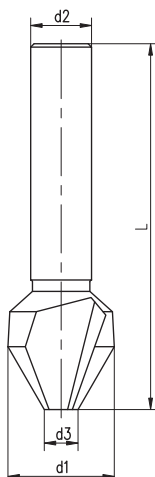

4205

d1	d3	L	d2 h9
mm	mm	mm	mm
6,3	1,6	45	5
8	2	50	6
12,5	3,2	56	8
16	4	63	10
20	5	67	10
25	6,3	71	10

4225

d1	d3	L	d2 h9
mm	mm	mm	mm
4,3	1,3	40	4
5	1,5	40	4
5,3	1,5	40	4
5,8	1,5	45	5
6	1,5	45	5
6,3	1,5	45	5
7	1,8	50	6
7,3	1,8	50	6
8	2	50	6
8,3	2	50	6
9,4	2,2	50	6
10	2,5	50	6
10,4	2,5	50	6
11,5	2,8	56	8
12,4	2,8	56	8
13,4	2,9	56	8
15	3,2	60	10
16,5	3,2	60	10
19	3,5	63	10
20,5	3,5	63	10
23	3,8	67	10
25	3,8	67	10
26	3,8	67	10
28	4	71	12
30	4,2	71	12
31	4,2	71	12

Dados de corte, ver página 136