


Escareador 3 cortes detalonado-retificado axial e radial, corte à direita, haste cone morse DIN 228 B.
 Three flute countersink relief ground axially and radially, right hand cut, morse taper shank DIN 228 B.



4206
60° - DIN 334 D

4226
90° - DIN 335 D

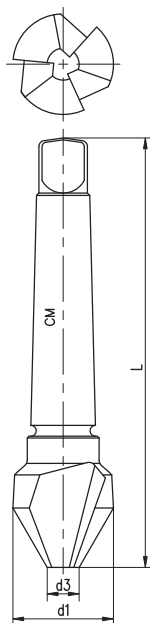

4206

d1	d3	L	CM
mm	mm	mm	
16	4	90	1
20	5	106	2
25	6,3	112	2
31,5	10	118	2
40	12,5	150	3
50	16	160	3
63	20	190	4
80	25	200	4

4226

d1	d3	L	CM
mm	mm	mm	
15	3,2	85	1
16,5	3,2	85	1
19	3,5	100	2
20,5	3,5	100	2
23	3,8	106	2
25	3,8	106	2
26	3,8	106	2
28	4	112	2
30	4,2	112	2
31	4,2	112	2
34	4,5	118	2
37	4,8	118	2
40	10	140	3
50	14	150	3
63	16	180	4
80	22	190	4